



SOVERN

GROUP

WALL PANELS

SPC and LSPC wall panels, *quick to install*

Stone plastic composite wall panels: a UV coating, wear layer and decor film on a rigid SPC core. Waterproof and low maintenance, click lock or tongue and groove, panels to 2900 mm and tiles from 300 x 600 mm, in ten decors and five textures.

INTERIOR WALLS | PANELS 2400 TO 2900 MM | TILES 300 X 600 TO 600 X 1200 MM | ISSUED 24 OCT 2026

In this catalogue

What an SPC / LSPC panel is	PAGE 3
Specifications: SPC and LSPC panels	PAGE 4
LSPC tile	PAGE 5
Joining methods	PAGE 6
Colour selection, ten decors	PAGES 7 AND 8
Packaging	PAGE 9
Technical specifications	PAGE 10
Accessories	PAGE 11
Installation	PAGE 12
Enquire	PAGE 13

PANEL

SPC 4 or 5 mm; LSPC 6, 8 or 10 mm. 600, 900 or 1200 mm wide, 2400 to 2900 mm long or customised

DECORS

Ten decors in fine sand matte or textured matte, and high gloss; wood, marble, fabric, metallic and solid colour textures

JOINING

Click lock, tongue and groove, glue-down or H trim; seamless, V-groove or controlled-gap joints

TRIMS

H-joint, internal and external corner, end cap and clip, in matte black, matte grey, antique bronze or the panel colour




What an SPC / LSPC panel is

SPC wall panels combine modern aesthetics with durability and easy installation, an ideal solution for contemporary interior spaces. Made from stone plastic composite, SPC wall panels are waterproof, fire resistant, low maintenance and environmentally friendly.

LSPC wall panels combine a lightweight structure with durable performance, a modern wall solution for contemporary interiors. Waterproof, moisture resistant and easy to install, LSPC panels provide both aesthetic appeal and practical performance.



Structure



TONGUE AND GROOVE EDGE

Specifications

Both panels are made to order in the options below; other lengths are customised.

SPC wall panel

LENGTH	2400 mm	2700 mm	2900 mm	Customised	
WIDTH	600 mm	900 mm	1200 mm		
THICKNESS	4 mm	5 mm			
SURFACE	Matte	High gloss			
TEXTURE	Wood	Marble	Fabric	Metallic	Solid colour
JOINING METHODS	Click lock	Tongue and groove	Glue-down	H trim	
JOINT DESIGN	Seamless joint	V-groove joint	Controlled gap		

LSPC wall panel, density 850 kg/m³

LENGTH	2400 mm	2700 mm	2900 mm	Customised	
WIDTH	600 mm	900 mm	1200 mm		
THICKNESS	6 mm	8 mm	10 mm		
SURFACE	Matte	High gloss			
TEXTURE	Wood	Marble	Fabric	Metallic	Solid colour
JOINING METHODS	Click lock	Tongue and groove	Glue-down	H trim	
JOINT DESIGN	Seamless joint	V-groove joint	Controlled gap		



LSPC tile

Tongue and groove tiles in four formats, for wet rooms and feature walls.




Formats



300 x 600 mm



385 x 900 mm



300 x 1200 mm




600 x 1200 mm

Tiles use the same decors and surfaces as the panels. Tell us the format and decor and we confirm the lead time.


Joining methods

Six ways to join panels. Panel profiles and metal trims can be customised.



H trim

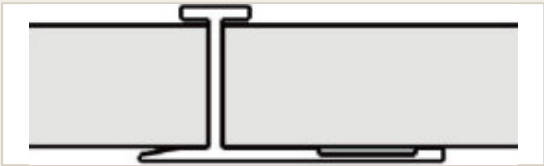



Slim H trim

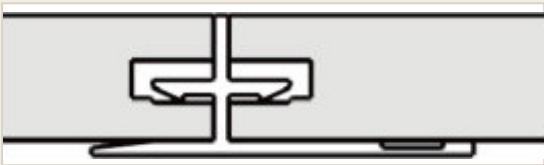



Controlled gap

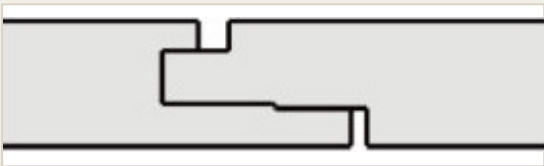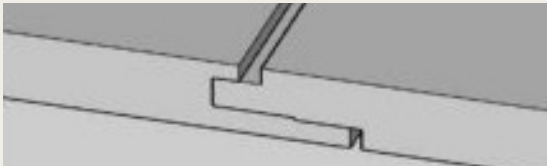


Tongue and groove

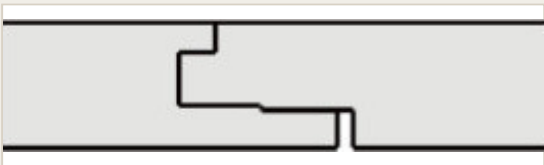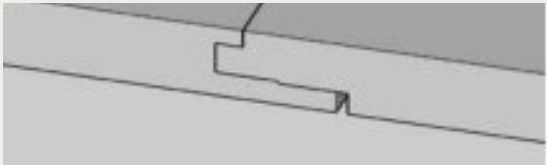

Click lock

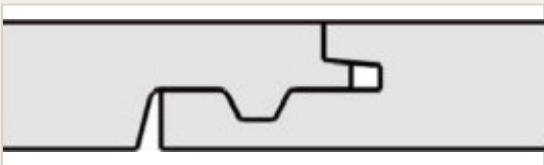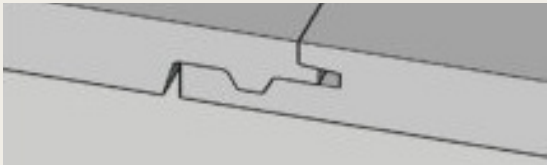

V-groove joint

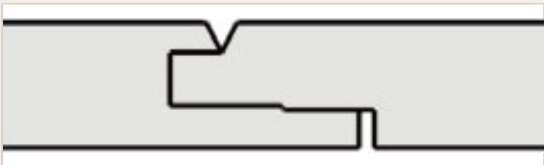

PROFILE

JOINT INSTALLED

Colour selection

Ten decors for SPC and LSPC panels and tiles. Each is made in a matte finish and in high gloss.

WP-01

FINE SAND MATTE OR HIGH GLOSS



PANEL 2700 MM LONG




TILE 1200 x 300 MM

WP-02

FINE SAND MATTE OR HIGH GLOSS



PANEL 2700 MM LONG

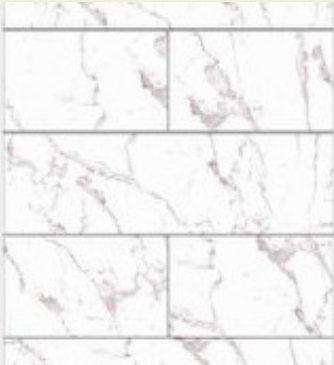


TILE 1200 x 300 MM

WP-03

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG

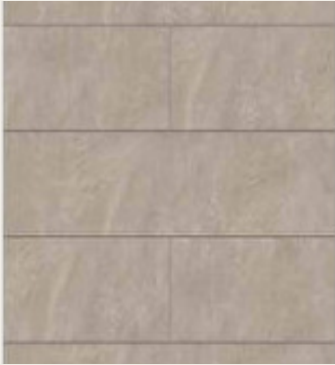

TILE 1200 x 300 MM

WP-04

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

WP-05

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

WP-06

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

Colour selection

WP-07

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

WP-08

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

WP-09

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

WP-10

TEXTURED MATTE OR HIGH GLOSS



PANEL 2700 MM LONG



TILE 1200 x 300 MM

Panels are made 600, 900 or 1200 mm wide. Quote the decor code with the format, surface and joining method.

Packaging

Panels are packed in cartons and strapped on pallets for container loading, with dunnage bags between stacks.



Carton print, carton size, colours and box design can be made to your brand. Carton and pallet counts per format are given on your quotation.

Technical specifications

Factory test results for SPC / LSPC wall panel. ND means not detected.

Physical properties

ITEM	TEST METHOD	RESULT
Dimensional stability	ISO 23999:2021	X direction 0.10% Y direction 0.00%
Curling	ISO 23999:2021	Initial 0.0 mm Final 0.5 mm
Electrical resistance	EN 1081:2018+A1:2020	Average $4.081 \times 10^{12} \Omega$ Maximum $5.881 \times 10^{12} \Omega$ Minimum $2.821 \times 10^{12} \Omega$

Surface performance







ITEM	TEST METHOD	RESULT
Pencil hardness	GB/T 6739-2006	H
Colour fastness	ISO 105-B02	Grade 5 or better

Environmental and safety performance



ITEM	TEST METHOD	RESULT
Formaldehyde release	GB/T 39600-2021	ND
Heavy metal migration	EN 71-3:2019+A1:2021	ND
VOC emission	GB/T 35601-2017	Pass

Accessories

Aluminium trims and a fixing clip for the panels. Other metal trims can be made to order.

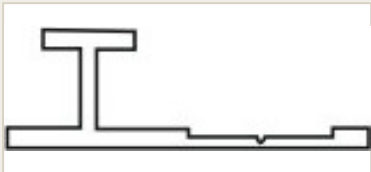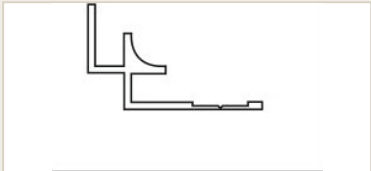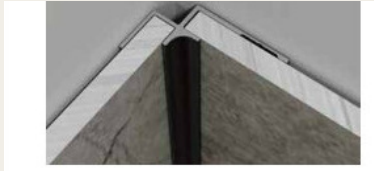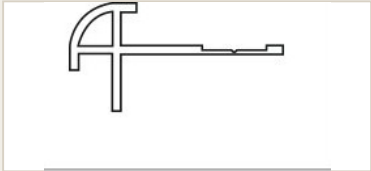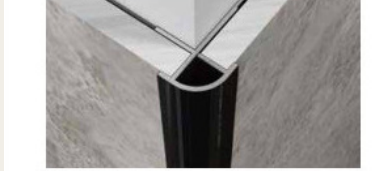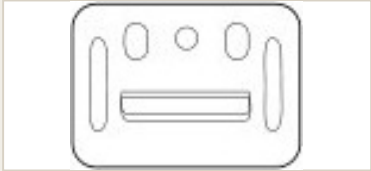
H-joint			
Internal corner			
External corner			
End cap			
Clip			
	SECTION	PROFILE	INSTALLED

Trim colours

			
Matte black	Matte grey	Antique bronze	Same colour as the panel


Installation

Six steps, with structural adhesive and clips. No wet trades.

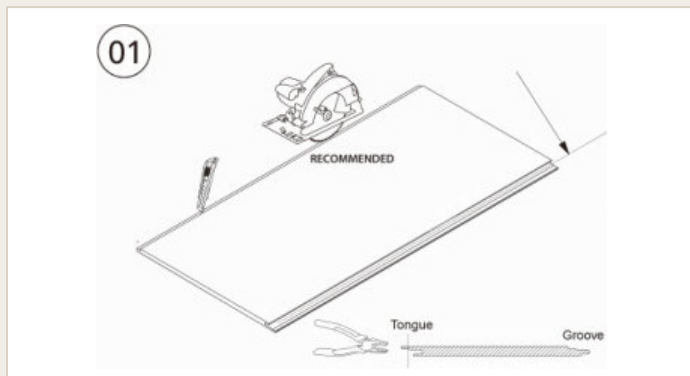


01

Cut the panel to size.

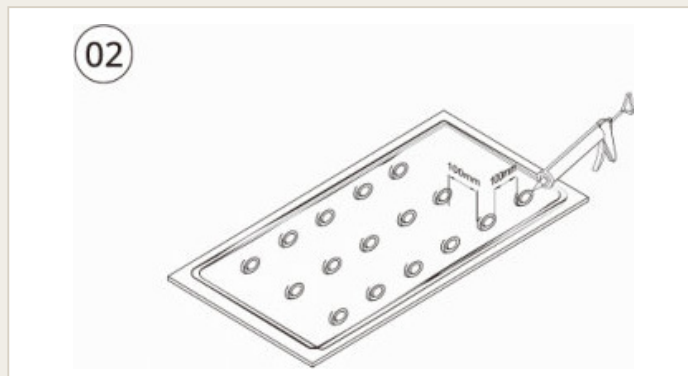


02

Apply structural adhesive to the back of the panel.

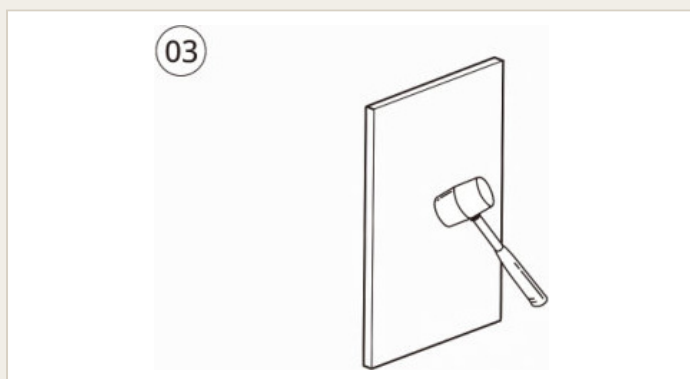


03

Press the panel firmly against the wall and tap it with a rubber mallet so the adhesive takes.

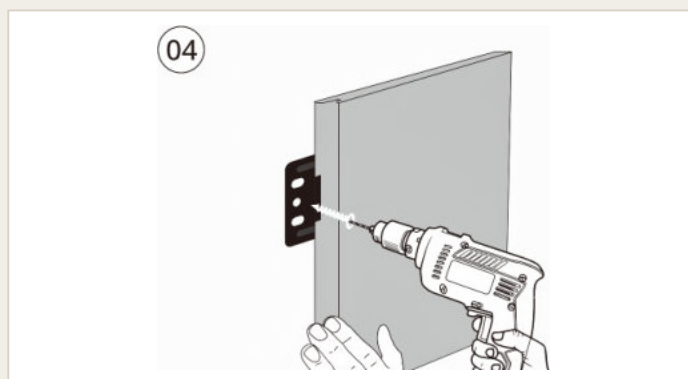


04

Insert the clip into the groove and fix it to the wall with screws or steel nails, one clip about every 50 cm.

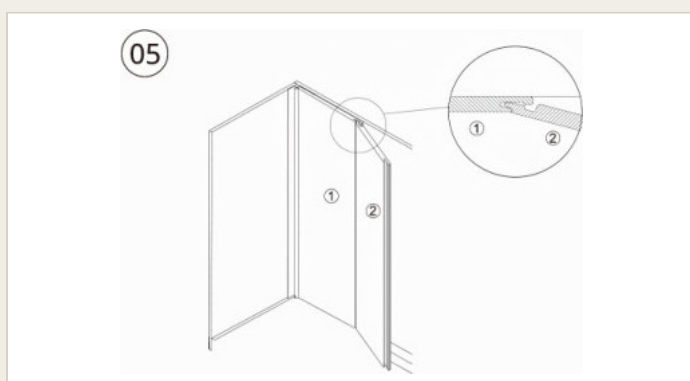

05

Insert the tongue of the second panel into the groove of the first and fix it the same way.

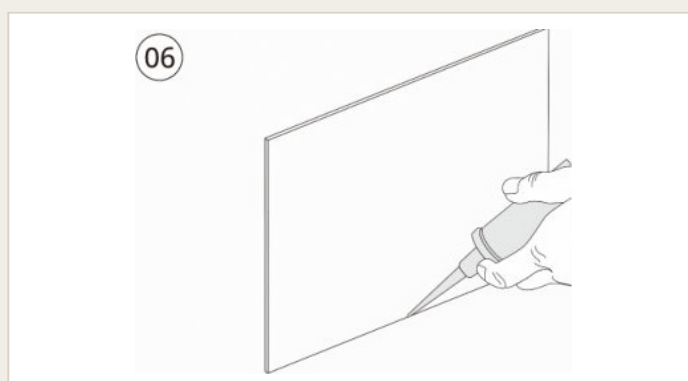

06

Install the remaining panels in sequence. Seal the joints between the panels and the floor with waterproof sealant for a clean perimeter.

Ask for a quotation

Send us the decor codes, format, thickness, surface and joining method, with the quantity in square metres or panels, and we will send your quotation with the carton and pallet counts.

Samples of any decor can be arranged.


Sovern Group

alex@soverngroup.co

[+886 970 781 818](tel:+886970781818)

soverngroup.co

Follow us on LinkedIn: [linkedin.com/company/sovern-group](https://www.linkedin.com/company/sovern-group)



WeChat

SCAN TO ADD ALEX MCCONNELL



WhatsApp

SCAN TO MESSAGE ALEX